



PRODUCT SELECTION GUIDE





Olde Country Ledgestone



Sunizona Olde Country Ledgestone Asv-3045 Forest Olde Country Ledgestone Asv-3001





Roebuck Olde Country Ledgestone



Asv-3027









San Diego Olde Country Ledgestone Asv-3051 Chardonnay Olde Country Ledgestone

Honey Olde Country Ledgestone Asv-3049


Available in the following color palette unless custom matched. The unique texture and pattern make it one of the most popular styles we offer. Finally, this hand selected stone will convince you that it is one of a kind texture not found in the rest of the industry.









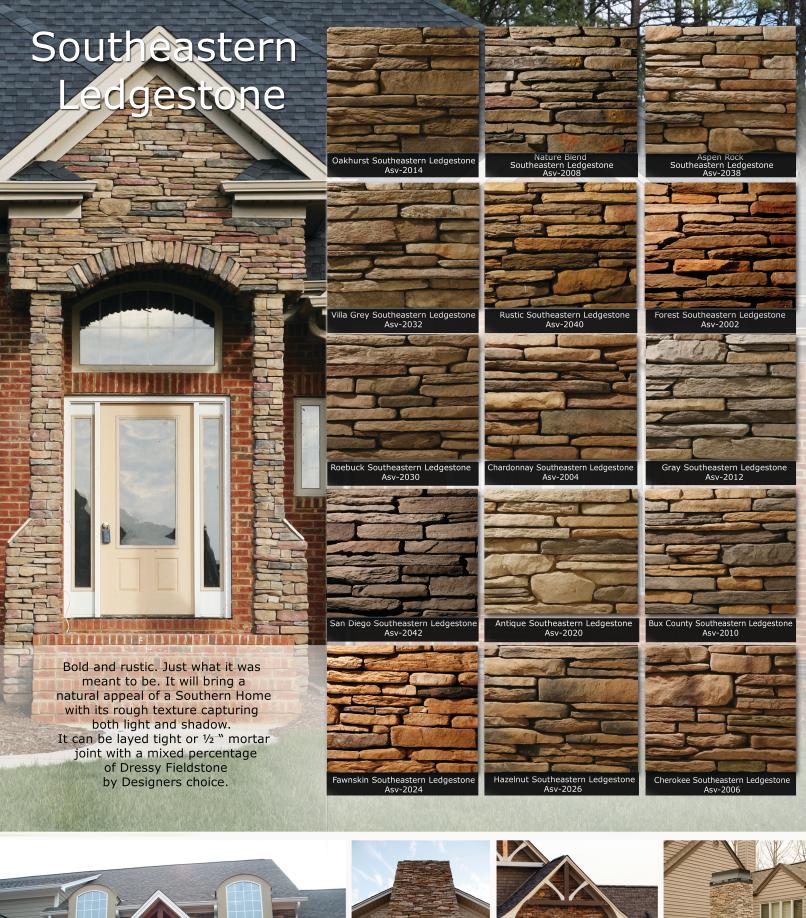










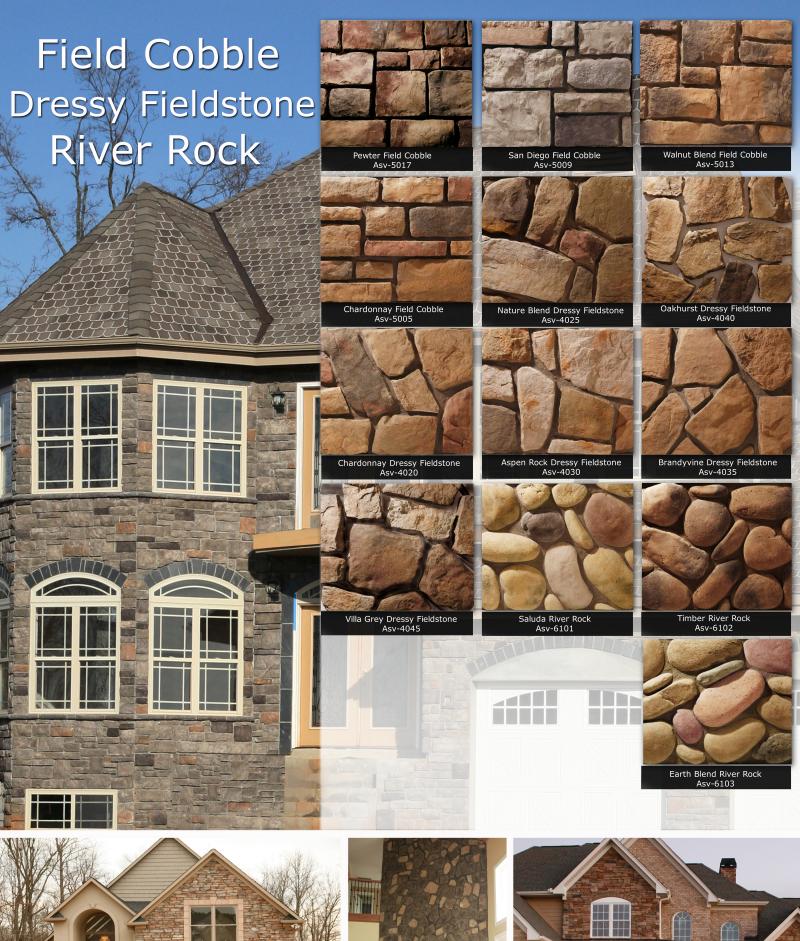







6"x8" Trim Stones



90° Corners



Capstones



Includes a grand variety of sills, trim stones and more - which is like the cakes icing. Offering infinite ways to compliment a project with any style.











All accessories are available in four colors (Buckskin, Champagne, Gray and Taupe)

Electrical Box, Light Box and Lintel Stones are available



TECH DATA & WARRANTY



Limited Warranty:

ANATOLIY STONE® products carry a 50-year limited warranty when used on structures that conform to local codes and when installed according to the manufactures specifications. Warranty is limited to repair or replacement of defective materials only and does not cover labor to remove and replace. The manufacture will not be liable for any cracked or damaged product due to mishandling.

Warranty does not cover damage resulting from building settlement, improper installation, wall movement, contact with chemicals or paint, discoloration due to airborne contaminants, and staining or oxidation.

Warranty is limited to the original purchaser and may not be transferred.

NOTES

- Just as natural stone will vary in color, Anatoliy Stone will reflect some variation in color.
 Actual stone color may vary from brochure. It may also vary from existing structures.
- Anatoliv Stone recommends grouting on all exterior applications, in harsh weather climates.
- Stone veneer is not intended and will not hold up to foot traffic.
 Like any other concrete product, under certain weather temperatures and conditions, stone may have signs of efflorescence.
- . Anatoliy Stone is not responsible for discoloration due to run off from adjacent building materials.

All Photos provided by: NillSilverPhotography.com Graphic Design and Printing by: OneSmartMedia





Technical Data:

Compressive Strength 5500 psi

Absorption 15%

Unit Weight 7.5-12 lb/sq.ft Thickness 1.75 inch. average

Colorfast Colors become integral with

the stone during casting. Existing stone will not show no undesirable change after years of weathering.

Installation Instructions:

ANATOLIY STONE®can be applied to any structurally sound surface and needs no special structural foundation alteration or additions due to its light

Apply ANATOLIY STONE® directly to the surface of concrete block, brick, and other masonry surface only if the surfaces are clean and unpainted. All other surfaces must be covered with a weather resistant barrier and a 2.5 # Galvanized Metal Lath. Apply metal flashing were needed.

(1) Sheathing, (2) Weather-resistant barrier, (3) Galvanized metal lath, (4) mortar, scratch coat, (5) Anatoliy Stone® veneer, (6) mortar joint.



PACKAGING



Square foot coverages are based on 1/2" mortar joints. Colors of stones are as close to the actual stone color as possible through modern photography and printing methods. Variations of colors may be expected. It is recommended you view the actual product samples

Custom colors are available upon request by our independent laboratory.

© 2006-2016 Anatoliy Stone Products 8

